

IT15



Macchina interceppo singola reversibile.
Single reversible inter-row cultivator.
Machine intercep simple reversible.
Einseitiger umkehrbarer Unterstockräumer.

Scopri di più su questo prodotto:
Find out more on this product:
En savoir plus sur ce produit:
Mehr dazu um dieses Produkt:



Misure di lavoro

Working dimensions - Mesures de travail - Arbeitsmaße

	Attacco telaio Frame attachment Attache du châssis Rahmenanschluss	Peso Weight Poids Gewicht	 min.	
IT 15 H	3 punti anteriore/posteriore Front/Rear 3 points	160 kg	225*	min. 130* max. 180*
IT 15 E	3 points avant/arrière 3-Punktanbau vorne/hinten	205 Kg	230*	min. 125* max. 185*
IT 15 A	Anteriore con staffa Front on bracket Support de fixation avant Vorne auf Formkasten	235 kg	220*	min. 115* max. 175*
IT 15 3A	Anteriore su sollevatore Front lifter Rélévage avant Vorne auf Heber	220 Kg	220*	min. 115* max. 175*

H - Idraulico - Hydraulic - Hydraulique - Hydraulisch

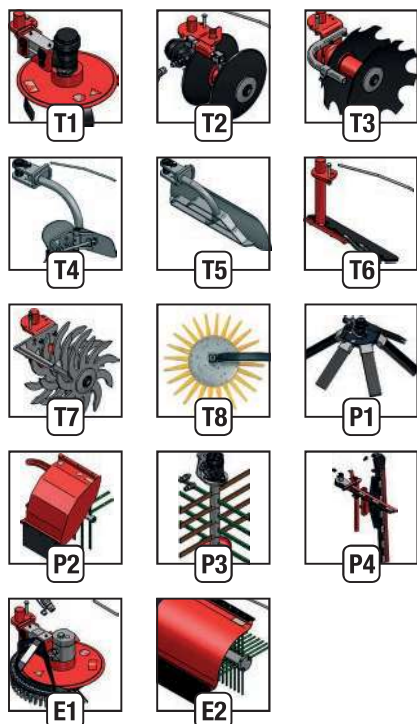
E - Elettro-Idraulico - Electro-hydraulic - Électro-hydraulique - Elektrohydraulisch

Flusso olio 12÷15 L/min - Oil flow rate 12÷15 L/min - Débit d'huile 12÷15 L/min - Ölfluss 12÷15 L/min

* Considerando carreggiata trattore agricola di 160 cm - Considering tractor's roadway width of 160 cm
En considérant une largeur de route du tracteur de 160 cm - Angenommene Breite des Schleppers von 160 cm

ATTREZZI • p. 22-26

Tools - Outils - Werkzeuge



IT10

IT15

IT20

IT21

IT30

IT40

IT110

IT115

IT200

CT20

CT50

CT60

PA10

PA20